

Dreisilker specializes in Custom Blower Shafts and Balloon Shaft Repair




Balloon Shaft Repair

- Remove ends, replace with solid shaft plug.
- Solid shaft plug is welded to the balloon (hollow) shaft.
- Checked for concentricity and runout.
- Recommend field balancing after installation (By DEM Field Service Department).
- Balloon shaft wheels have clamp type mountings with no-keyways, rebalancing in the field is required for warranty.
- Up to 4" O.D. any length of shaft: Over 4" O.D. 9 Ft. Max Length.

Pricing

- Up to 1-1/2" Dia. Pulley Side \$525.00
- Opposite Pulley End \$475.00
- Over 1-1/2" Dia. Pulley Side \$675.00
- Opposite Pulley End \$525.00

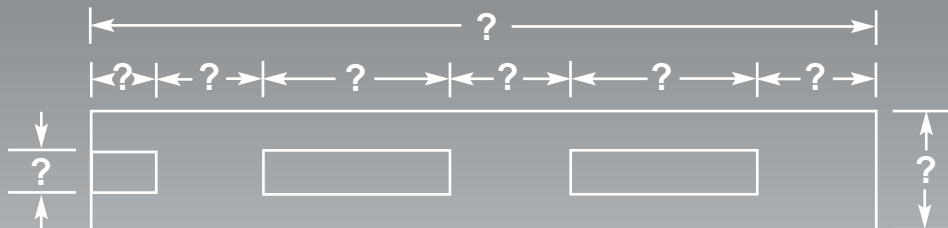

New Shafts

- Material is Ground and Polished, Special Accuracy +/- .005 Tolerance
- Snap Ring Grooves:
- Keyways:
- Flats:
- External or Internal Threads:

We recommend that new bearings either be supplied by you at the time of order or purchase from our extensive inventory. Pricing varies on the size of the shafts and details of prints.

High-Accuracy • Quick Turnaround • Materials On-Hand

352 Roosevelt Rd., Glen Ellyn, IL 60137 • 630-469-7510 • Toll Free: 800-922-1882 • Fax 630-469-2294
www.emotorstore.com • www.dreisilker.com

